


Conusstukken, RVS 304/304L

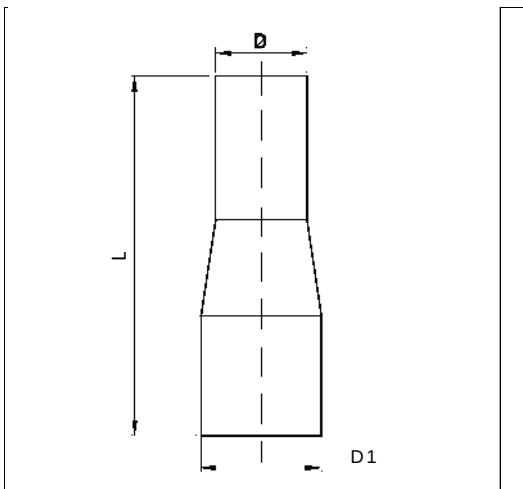

Kenmerken


- Geforceerd en gelast uit koudgewalste buis volgens DIN 11850 / DIN 17457 -
- Materiaal: RVS 304/RVS 304L (1.4301/1.4307)
- In- en uitwendig ontvet

Opties

- Andere materiaalsoorten, o.a. RVS 316, St. 12.03 etc.
- Afwijkende lengtes

in mm (D1/D2)		Diameter (uitw.) x wanddikte	
		Inbouwlengte in mm (L)	Artikel nummer
40,0 x 1,5 / 38,0 x 1,5		150	L3K0400038015
45,0 x 1,5 / 40,0 x 1,5		120	L3K0450040015
45,0 x 1,5 / 38,0 x 1,5		150	L3K0450038015
48,3 x 2,0 / 40,0 x 1,5		200	L3K0483040020
50,0 x 1,5 / 45,0 x 1,5		150	L3K0500045015
50,0 x 1,5 / 45,0 x 1,5		200	L3K0500045015
50,0 x 1,5 / 40,0 x 1,5		120	L3K0500040015
50,0 x 1,5 / 40,0 x 1,5		150	L3K0500040015
50,0 x 1,5 / 40,0 x 1,5		200	L3K0500040015
50,0 x 1,5 / 38,0 x 1,5		150	L3K0500038015
50,0 x 1,5 / 38,0 x 1,5		200	L3K0500038015
54,0 x 2,0 / 50,0 x 1,5		200	L3K0540050020
54,0 x 2,0 / 50,0 x 2,0		200	L3K0540050020
54,0 x 2,0 / 45,0 x 1,5		150	L3K0540045020
54,0 x 2,0 / 45,0 x 1,5		200	L3K0540045020
54,0 x 2,0 / 40,0 x 1,5		150	L3K0540040020
54,0 x 2,0 / 40,0 x 1,5		200	L3K0540040020
54,0 x 2,0 / 38,0 x 1,5		200	L3K0540038020
60,3 x 2,0 / 54,0 x 2,0		200	L3K0603054020
60,3 x 2,0 / 50,0 x 1,5		200	L3K0603050020
60,3 x 2,0 / 50,0 x 1,5		150	L3K0603050020
60,3 x 2,0 / 48,3 x 2,0		200	L3K0603048320
60,3 x 2,0 / 45,0 x 1,5		200	L3K0603045020
60,3 x 2,0 / 40,0 x 1,5		200	L3K0603040020
60,3 x 2,0 / 38,0 x 1,5		200	L3K0603038020
63,5 x 2,0 / 50,0 x 1,5		150	L3K0635050020
65,0 x 2,0 / 60,3 x 2,0		150	L3K0650060320
65,0 x 2,0 / 60,3 x 2,0		200	L3K0650060320
65,0 x 2,0 / 54,0 x 2,0		200	L3K0650054020
65,0 x 2,0 / 50,0 x 1,5		200	L3K0650050020
65,0 x 2,0 / 45,0 x 1,5		200	L3K0650045020
65,0 x 2,0 / 40,0 x 1,5		200	L3K0650040020

Conusstukken, RVS 304/304L

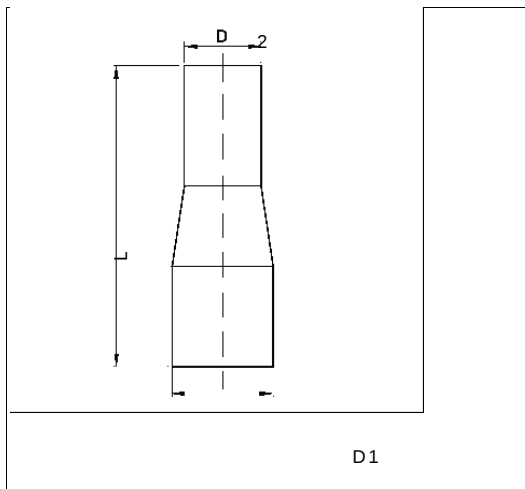

Kenmerken

- Geforceerd en gelast uit koudgewalste buis volgens DIN 11850 / DIN 17457 -

Materiaal: RVS 304/RVS 304L
(1.4301/1.4307)


- In- en uitwendig ontvet

Opties

- Andere materiaalsoorten, o.a. RVS 316, St. 12.03 etc.
- Afwijkende lengtes

Diameter (uitw.) x wanddikte in mm (D1/D2)	Inbouwlengthe in mm (L)	Artikel nummer
70,0 x 2,0 / 65,0 x 2,0	200	L3K0700065020
70,0 x 2,0 / 60,3 x 2,0	200	L3K0700060320
70,0 x 2,0 / 54,0 x 2,0	200	L3K0700054020
70,0 x 2,0 / 50,0 x 1,5	200	L3K0700050020
70,0 x 2,0 / 45,0 x 1,5	200	L3K0700045020
70,0 x 2,0 / 40,0 x 1,5	300	L3K0700040020
76,1 x 2,0 / 70,0 x 2,0	200	L3K0761070020
76,1 x 2,0 / 65,0 x 2,0	300	L3K0761065020
76,1 x 2,0 / 65,0 x 2,0	200	L3K0761065020
76,1 x 2,0 / 60,3 x 2,0	200	L3K0761060320
76,1 x 2,0 / 54,0 x 2,0	250	L3K0761054020
76,1 x 2,0 / 50,0 x 1,5	200	L3K0761050020
76,1 x 2,0 / 48,3 x 2,0	250	L3K0761048320
76,1 x 2,0 / 45,0 x 1,5	250	L3K0761045020
76,1 x 2,0 / 40,0 x 1,5	250	L3K0761040020
76,1 x 2,0 / 38,0 x 1,5	250	L3K0761038020
80,0 x 2,0 / 76,1 x 2,0	200	L3K0800076120
80,0 x 2,0 / 70,0 x 2,0	200	L3K0800070020
80,0 x 2,0 / 65,0 x 2,0	200	L3K0800065020
80,0 x 2,0 / 60,3 x 2,0	200	L3K0800060320
80,0 x 2,0 / 54,0 x 2,0	300	L3K0800054020
80,0 x 2,0 / 50,0 x 2,0	300	L3K0800050020
80,0 x 2,0 / 50,0 x 1,5	300	L3K0800050020
80,0 x 2,0 / 45,0 x 1,5	350	L3K0800045020
80,0 x 2,0 / 40,0 x 1,5	350	L3K0800040020
84,0 x 2,0 / 80,0 x 2,0	250	L3K0840080020
84,0 x 2,0 / 76,1 x 2,0	250	L3K0840076120
84,0 x 2,0 / 70,0 x 2,0	250	L3K0840070020
84,0 x 2,0 / 60,3 x 2,0	250	L3K0840060320
88,9 x 2,0 / 84,0 x 2,0	300	L3K0889084020
88,9 x 2,0 / 80,0 x 2,0	300	L3K0889080020
88,9 x 2,0 / 76,1 x 2,0	300	L3K0889076120
88,9 x 2,0 / 70,0 x 2,0	300	L3K0889070020
88,9 x 2,0 / 65,0 x 2,0	300	L3K0889065020
88,9 x 2,0 / 60,3 x 2,0	300	L3K0889060320
100,0 x 1,5 / 88,9 x 2,0	300	L3K1000088915
100,0 x 1,5 / 80,0 x 2,0	300	L3K1000080015
100,0 x 1,5 / 70,0 x 2,0	300	L3K1000070015
100,0 x 1,5 / 65,0 x 2,0	300	L3K1000065015

Conusstukken, RVS 304/304L

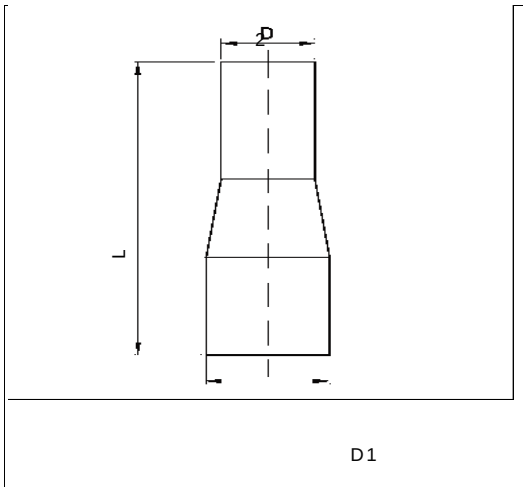

Kenmerken

- Geforceerd en gelast uit koudgewalste buis volgens DIN 11850 / DIN 17457 -

Materiaal: RVS 304/RVS 304L

(1.4301/1.4307)

- In- en uitwendig ontvet

Opties

- Andere materiaalsoorten, o.a. RVS 316, St. 12.03 etc.
- Afwijkende lengtes

Diameter (uitw.) x wanddikte in mm (D1/D2)	Inbouwlengte in mm (L)	Artikel nummer
101,6 x 2,0 / 88,9 x 2,0	300	L3K1016088920
101,6 x 2,0 / 84,0 x 2,0	300	L3K1016084020
101,6 x 2,0 / 80,0 x 2,0	300	L3K1016080020
101,6 x 2,0 / 76,1 x 2,0	300	L3K1016076120
101,6 x 2,0 / 70,0 x 2,0	300	L3K1016070020
101,6 x 2,0 / 65,0 x 2,0	300	L3K1016065020
101,6 x 2,0 / 60,3 x 2,0	300	L3K1016060320
104,0 x 2,0 / 101,6 x 2,0	300	L3K1040101620
104,0 x 2,0 / 100,0 x 1,5	300	L3K1040100020
104,0 x 2,0 / 88,9 x 2,0	300	L3K1040088920
104,0 x 2,0 / 84,0 x 2,0	300	L3K1040084020
104,0 x 2,0 / 80,0 x 2,0	300	L3K1040080020
104,0 x 2,0 / 76,1 x 2,0	300	L3K1040076120
104,0 x 2,0 / 54,0 x 2,0	300	L3K1040054020
114,3 x 2,0 / 104,0 x 2,0	300	L3K1143104020
114,3 x 2,0 / 104,0 x 2,0	200	L3K1143104020
114,3 x 2,0 / 101,6 x 2,0	200	L3K1143101620
114,3 x 2,0 / 88,9 x 2,0	200	L3K1143088920
114,3 x 2,0 / 65,0 x 2,0	300	L3K1143065020
129,0 x 2,0 / 114,3 x 2,0	200	L3K1290114320
129,0 x 2,0 / 104,0 x 2,0	300	L3K1290104020
129,0 x 2,0 / 104,0 x 2,0	400	L3K1290104020
129,0 x 2,0 / 88,9 x 2,0	400	L3K1290088920
154,0 x 2,0 / 139,7 x 2,0	450	L3K1540139720
154,0 x 2,0 / 129,0 x 2,0	450	L3K1540129020
154,0 x 2,0 / 114,3 x 2,0	450	L3K1540114320
154,0 x 2,0 / 104,0 x 2,0	450	L3K1540104020